


6183

Angle de pas
Schrittwinkel
Step angle 9°


Diamètre
Durchmesser
Diameter 35 mm

Poids
Gewicht
Weight 75 g

Couple de retenue
Haltemoment
Holding torque 16/13 mNm






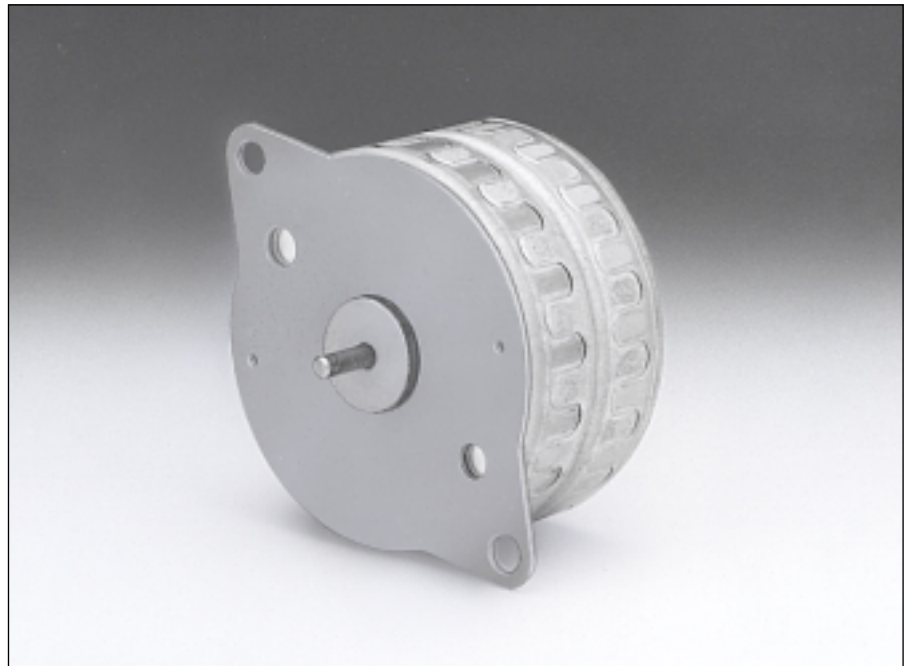


		Résistance de phase Phasenwiderstand Phase resistance Ω	Induct. de phase Phaseninduktivität Phase inductance mH	Courant de phase Phasenstrom Phase current A	Couple de retenue Haltemoment Holding torque mNm	Puissance nominale Nennleistung Nominal power W	Code câble Kabelcode Cable-code	
bipolar	6183-2-20	20	24	0.28	16	3.1	rouge rot red	
	6183-2-80	80	96	0.14	16	3.1	bleu blau blue	
	6183-2-320	320	380	0.07	16	3.1	vert grün green	
unipolar	6183-4-20	20	13	0.28	13	3.1	rouge rot red	
	6183-4-80	80	49	0.14	13	3.1	bleu blau blue	
	6183-4-320	320	210	0.07	13	3.1	vert grün green	


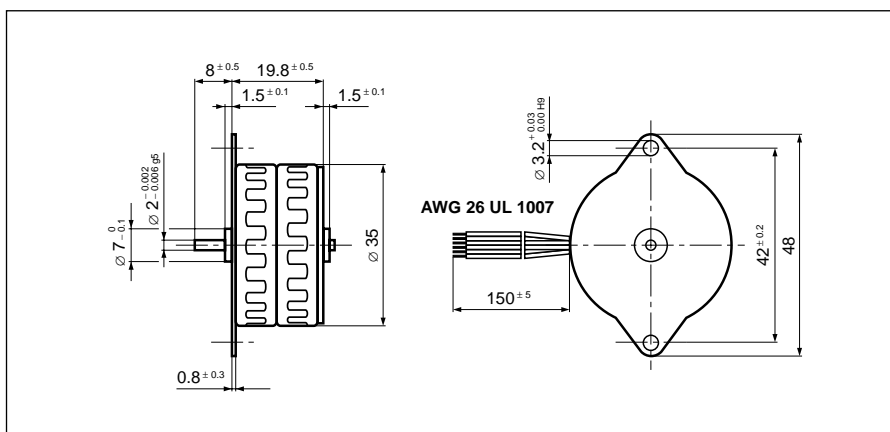


Pas/ Schritte/U Steps/rev	40
Précision/pas Schrittgenauigkeit Step accuracy	± 7 %
Inertie du rotor Rotorträgheitsmoment Rotor inertia	2.4 gcm²
Classe d'isolation Isolationsklasse Insulation class	E 120 °C
Protection Schutzart Protection	DIN 40050 IP 30
Tension d'essai Prüfspannung Test voltage	500 VAC
Couple résiduel Restmoment Detent torque	1.5 mNm

Caractéristiques dynamiques
Dynamische Daten
Dynamic characteristics

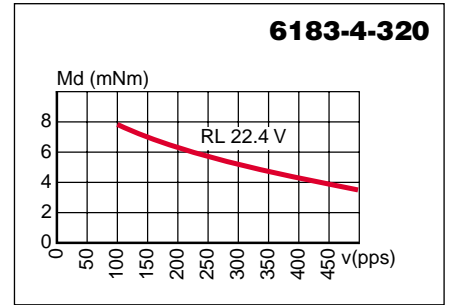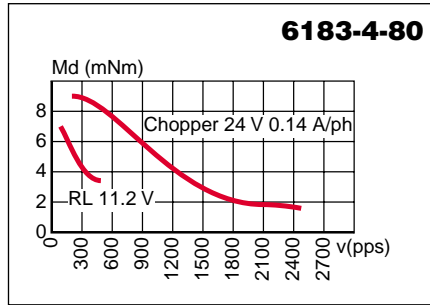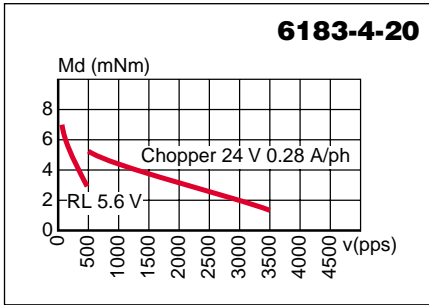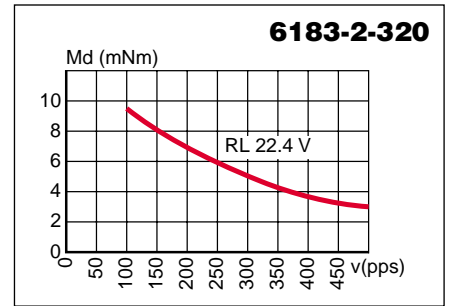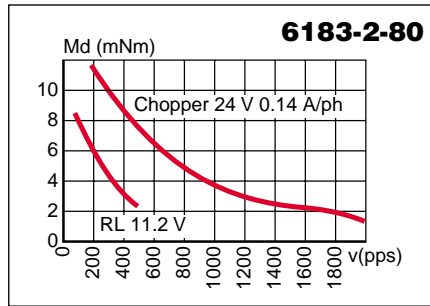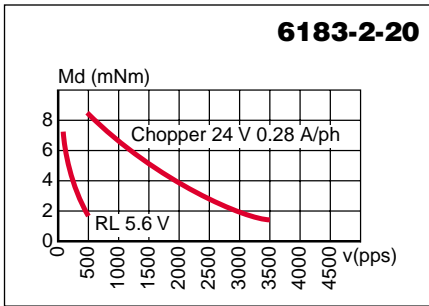

Caractéristiques statiques
Statische Daten
Static characteristics

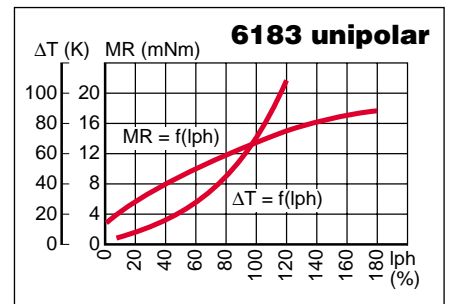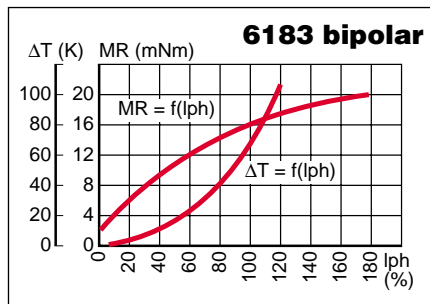

Possibilités d'exécutions adaptées sur demande.
 Auf Wunsch werden kundenspezifische Anforderungen berücksichtigt.
 Special requirements can be made to customer specification.

ACP&D Limited.
 Unit 9A,
 Charlestown Industrial Estate,
 Robinson Street,
 Ashton-under-Lyne,
 Lancashire, OL6 8NS.

Tel: +44 (0)161 343 1884
 Fax: +44 (0)161 339 0650
 e-mail: sales@acpd.co.uk
 Websites: www.acpd.com &
 www.acpd.co.uk

