



## ▶ Linear actuators

**7214**

- Max. Force ..... 35 N @ 200 pps
- Diameter ..... 25.4 mm
- Max. Travel ..... 18/80 mm
- Weight ..... 50 g
- Increment/step ..... 0.042 mm  
(24 steps/rev.)

The reliability of the actuator allows to use under extrem conditions where compact dimensions and precision are required.

### ▶ Technical data

Part N°	Phase resistance [Ω]	Phase inductance [mH]	Phase current [mA]	Max. Force [N]	Nominal power [W]	Phase tension [V]
7214-2-46	46	34	190	35	3.4	8.8


Max. travel length with antirotational device: 18 mm

Max. travel length without antirotational device: 80 mm


### ▶ Dimensions

*Drawing not to scale. All dimensions in mm.*

- With antirotational device (captive shaft)

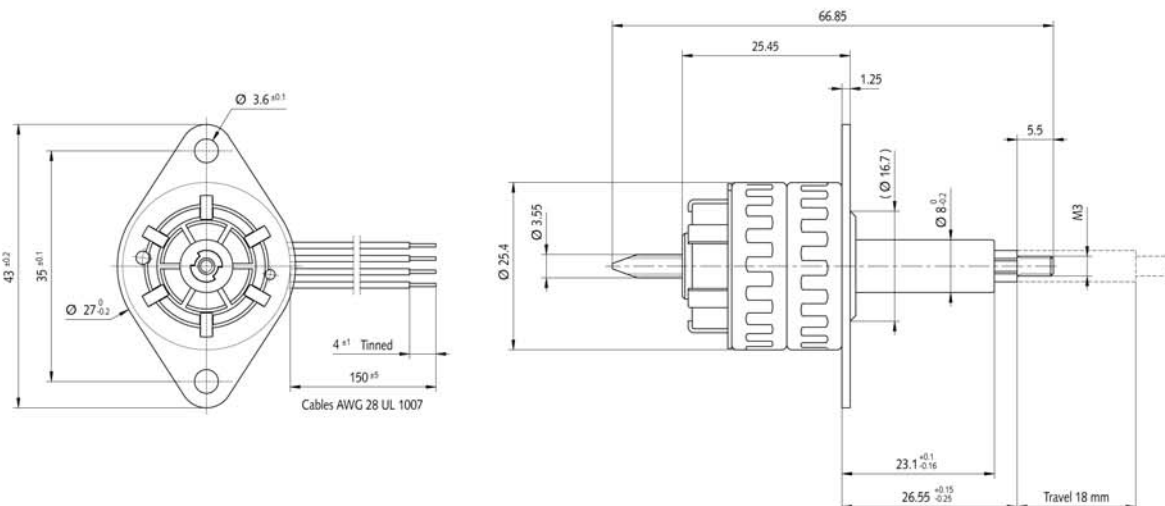


- Without antirotational device (non-captive shaft)

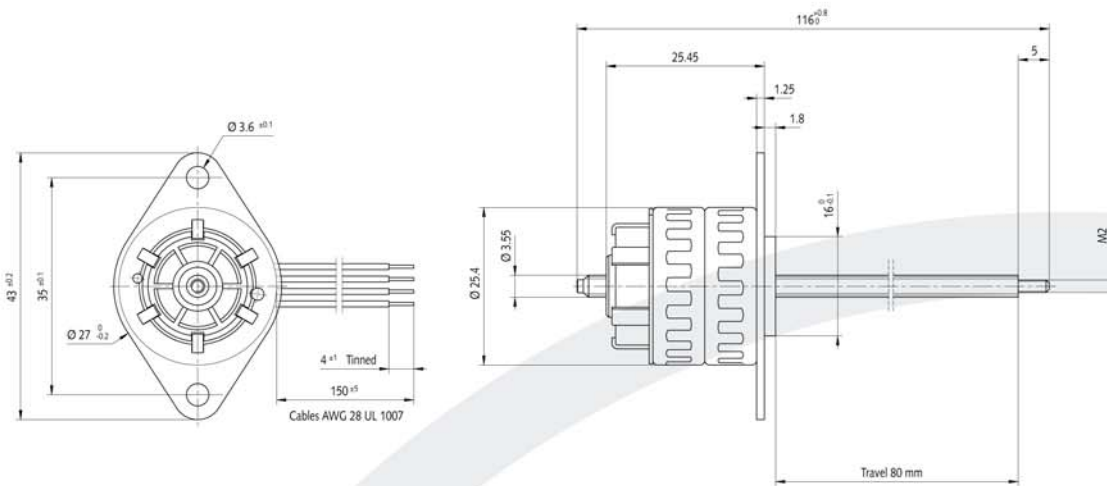

### ▶ Dynamic characteristics


- 7214-2-46

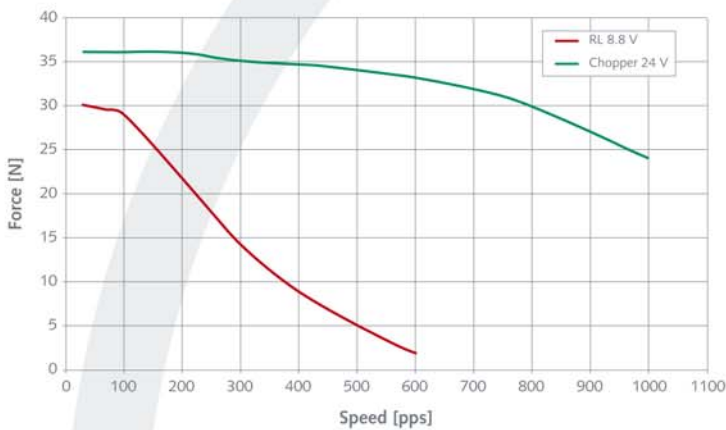


[pps] = pulses per second

### ▶ Electrical Interface and Step sequence

- Connection



- Steps sequence

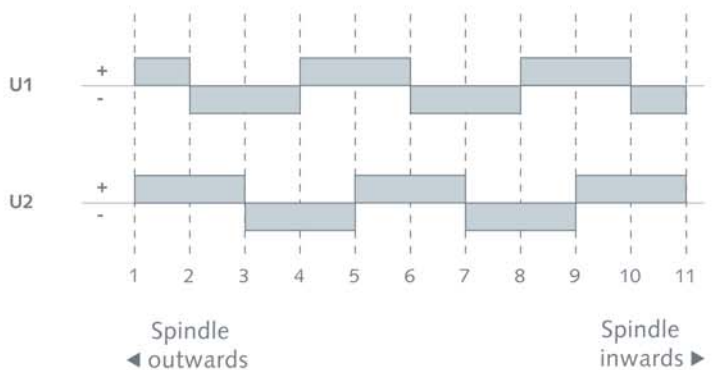

Special requirements upon customer specifications. Right to change reserved.

< 1.0 >

**ACP&D Limited**  
 86 Rose Hill Road,  
 Ashton-under-Lyne,  
 Lancashire,  
 England,  
 OL6 8YF.

Tel: +44 (0)161 343 1884  
 Fax: +44 (0)161 343 7773  
 e-mail: sales@acpd.co.uk  
 Websites: www.acpd.com &  
 www.acpd.co.uk

